FLUSH MOUNT FIXTURE
INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Thread the 1/8 IPS HEX NUTS (5) onto the NIPPLE (4) and screw the NIPPLE (4) onto the MOUNTING BRACKET (2). Without tighten the 1/8 IPS HEX NUTS (5) at this time.

2. Pull the SUPPLY WIRES (6 & 7) and the HOUSE GROUND WIRE (8) out from the OUTLET BOX (1) and attach the MOUNTING BRACKET (2) to the OUTLET BOX (1) using the slotted holes on the MOUNTING BRACKET (2) and the #8-32 IPS MOUNTING SCREWS (3) provided.

3. Attach the power supply wire to the fixture lead wires by connecting the BLACK SUPPLY WIRE (6) to the BLACK FIXTURE WIRE (10) ,and the WHITE SUPPLY WIRE (7) to the WHITE FIXTURE WIRE (9) using WIRE CONNECTORS(21). Connect the remaining HOUSE GROUND WIRE (8) to the FIXTURE GROUND WIRE (11) using a WIRE CONNECTOR (21) (not included). Place wiring and connections inside the OUTLET BOX (1).

ASSEMBLY AND INSTALLATION (Continued)

4. Place the FIXTURE PAN (12) of the fixture over the OUTLET BOX (1) so that the NIPPLE (4), protrudes out through the mounting hole located in the center of the FIXTURE PAN (12) 1/ 4". Remove the FIXTURE PAN (12) and secure the position of the NIPPLE (4) by tightening the 1/8" IPS HEX NUT (5) against the MOUNTING BRACKET (2). Place the FIXTURE PAN (12) back onto the NIPPLE (4), and secure into place using the DECORATIVE NUT (20).

5. Screw light bulbs into the lamp socket and make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label.

6. Place the ARM (14) over the FIXTURE PAN (12) & PLATE (16) and secure in place using the SCREWS (15) through the hole in the FIXTURE PAN (12) & PLATE (16) and tightening by screwing into the EYELET (22). Feed the NIPPLE & BALL (17) through the PLATE (16). Feed the BOTTOM COVER (18) onto the NIPPLE & BALL (17), and secure it in place using the BOTTOM FINIAL (19).Install the CRYSTAL LINE (13) as shown below.

INSTALLATION IS NOW COMPLETED

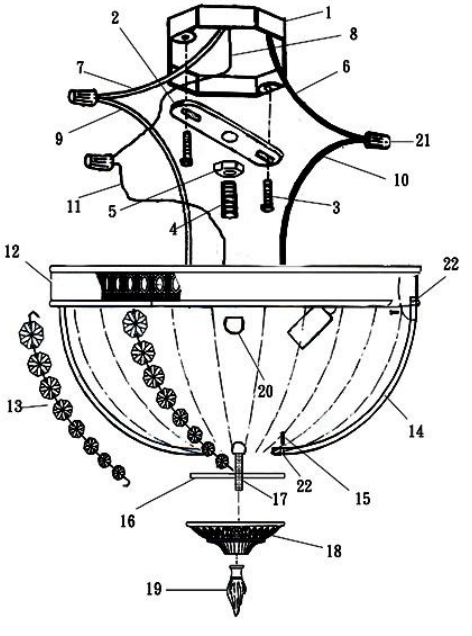

1. OUTLET BOX
2. MOUNTING BRACKET
3. MOUNTING SCREW
4. NIPPLE
5. 1/8 IPS HEX NUT
6. BLACK SUPPLY WIRE
7. WHITE SUPPLY WIRE
8. HOUSE GROUND WIRE
9. WHITE FIXTURE WIRE
10. BLACK FIXTURE WIRE
11. FIXTURE GROUND WIRE
12. FIXTURE PAN
13. CRYSTAL LINE
14. ARM
15. SCREW
16. PLATE
17. NIPPLE & BALL
18. BOTTOM COVER
19. FINIAL
20. DECORATIVE NUT
21. WIRE CONNECTOR
22. EYELET